
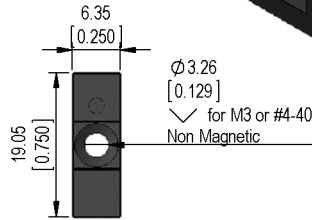




**Dimensions mm[inch]**

tolerances acc. to DIN ISO 2768-m  
Toleranzen gem. DIN ISO 2768-m

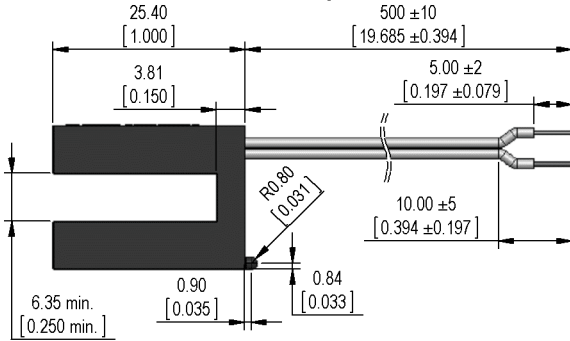

**Isometric**

Scale 1:2  
Maßstab 1:2

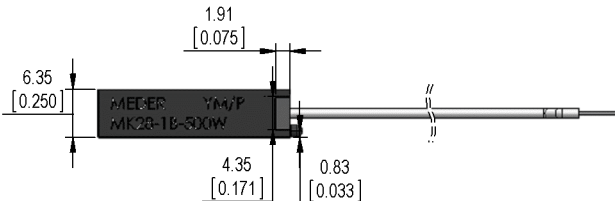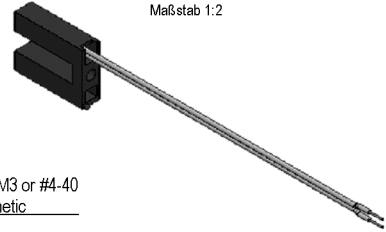


**Cable**

Flat Cable, LIYZ 2x0.14sqmm  
colour of wires: white

**Terminals/Connector**


Customer side: Ends tinned  
Kundenseite: Enden verzinkt

**Schematic**




**Marking**

MEDER-Label, Type,  
according to EN60062/factory code  
MEDER-Logo, Typ,  
gem. EN60062/Fertigungsstätte



**Switching distances**

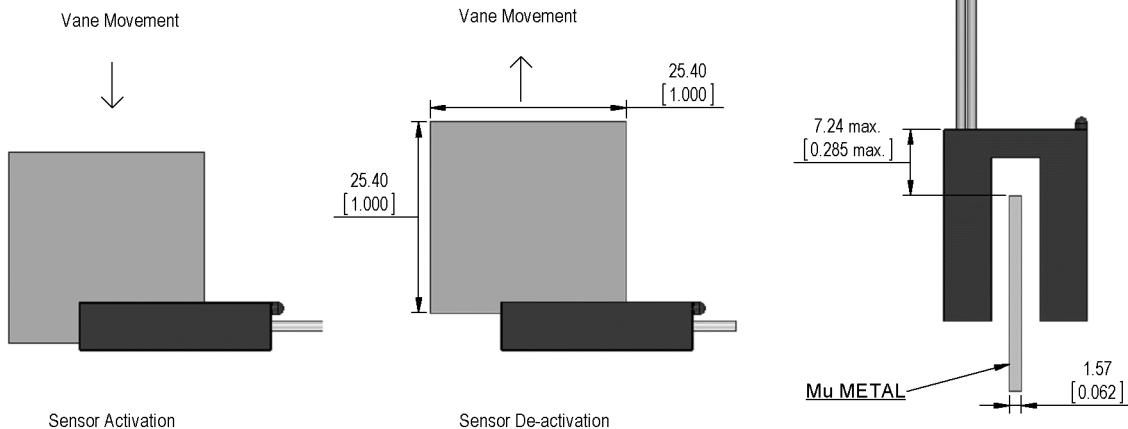



Europe: +49 / 7731 8399 0 | Email: info@standexmeder.com  
 USA: +1 / 508 295 0771 | Email: salesusa@standexmeder.com  
 Asia: +852 / 2955 1682 | Email: salesasia@standexmeder.com

Item No.:  
**9282661054**  
 Item:  
**MK28-1B-500W**

Magnetic properties	Conditions	Min	Typ	Max	Unit
Pull-In excitation (Reference value)	Reed switch unmodified measured in coil- "define operation"	15		20	AT
Test-Coil	Reed switch unmodified	KMS-01			

Special Product Data	Conditions	Min	Typ	Max	Unit
Contact - No.		66/3			
Contact - form		B - NC			
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			10	W
Switching voltage	DC or Peak AC			200	V
Carry current	DC or Peak AC			1,25	A
Switching current	DC or Peak AC			0,5	A
Sensor-resistance	measured with 40% overdrive			400	mOhm
Breakdown voltage	according to EN 60255-5	225			VDC
Housing material		Nylon 6/6			
Case color		black			
Sealing compound		UL94-V2 File-No E72640 (M) PU E8702 FW-Z/Herberts			

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine, duration 11ms, in 3 axis			50	g
Vibration	from 10 - 2000 Hz			20	g
Operating temperature		-40		105	°C
Storage temperature		-40		105	°C

Cable specification	Conditions	Min	Typ	Max	Unit
Cable type		flat cable			
Cable material		PVC			
Cross section		0.14 sq-mm			

General data	Conditions	Min	Typ	Max	Unit
Mounting advice		Magnetically conductive screws must not be used.			
Mounting advice		over 5m cable, a resistor is recommended.			
Tightening torque	Screw M3 ISO 1207 Disk ISO 7089			0,5	Nm

Modifications in the sense of technical progress are reserved

Designed at: 05.06.12 Designed by: MGLEICK  
 Last Change at: 12.02.16 Last Change by: SDAVIS

Approval at: 05.06.12 Approval by: TLANE  
 Approval at: 12.02.16 Approval by: MREIZNER

Rev. No.: 6